

YATE OUTDOOR SPORTS COMPLEX – Athletics Track Refurbishment

Proposed Works

A recent detailed appraisal of the facility identified a range of problems with the track surface and ancillary features.

The proposed works to refurbish the facilities, will involve the complete removal of the existing surface, the replacement with a new porous track and refurbishment of field event facilities. New provision will include improved access for disabled athletes, an extension to the western back straight to provide a second sprint facility and the potential inclusion of additional throwing event facilities.

In addition, consideration is being given to the upgrading of the track floodlighting system to improve performance in line with current planning guidance. The condition of the central grass arena will be improved through the provision of a land drainage system.

1. Extension to back straight to provide second sprint.
2. Refurbishment of Long/Triple Jump facility.
3. Extension of existing Northern 'D' to revise layout of field events.
4. Improvement of central grass area.
5. Provision of new Southern 'D' to improve access for disabled athletes.
6. Replacement of Throwing Circles.
7. Full replacement of track surface.
8. Refurbishment of Pole Vault facility.
9. Refurbishment of floodlighting system.

All work will be undertaken in accordance with current UK Athletics guidance.



Refurbished Layout



Relaying of Track – Base Rubber




Relaying of Track – Surface Layer



Relaying of Track – Surface Marking



Renewal of Field Event Facilities

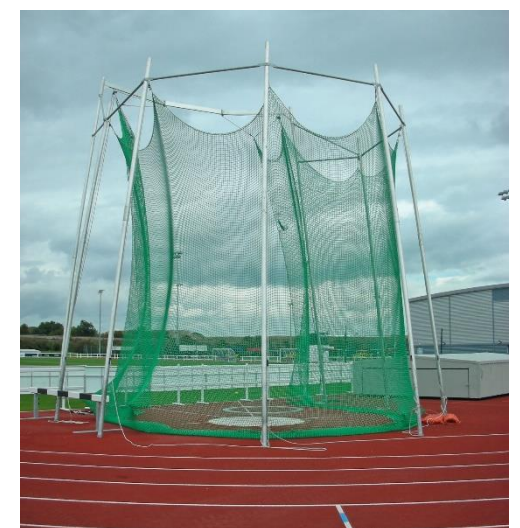

Improved Access for Disabled Athletes



Improved Floodlighting System

